



## LED Lighting

### Xiamen Xindeco Optoelectronics Co., Ltd.

Contact: Kingsley Wang

Tel: +86-0592-5937161

Fax: +86-0592-5930808

E-mail: [kingsley.wang@xindeco.com](mailto:kingsley.wang@xindeco.com)

Address: NO.610 Lingdou West Rd., Siming Dist Xiamen China P.C.361009

Web: [www.xinda-opto.com](http://www.xinda-opto.com)



## Company Introduction

### Xiamen Xindeco Optoelectronics Co., Ltd.:

- Stock market listed company, stock code: 000701
- Registered capital: 810 million RMB
- Building: More than 55,000 square meters of modern clean industrial plant in Xiamen
- Factory: 5 factories
- Turnover: Top 3 in China LED industry
- Main product: LED package;  
Indoor and outdoor LED light;  
LED display screen
- ISO 9001, ISO 14001, OHSAS 18001, BSCI, TUV, UL, CE




## Professional production




ETL CE RoHS ErP CB TM21 LM79

## Dimension

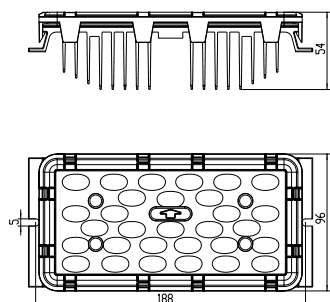

## Light Distribution Curve

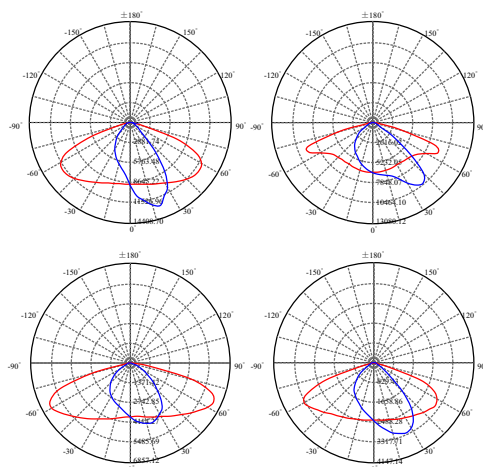


## Specification

Item No.	MK01
Dimension	198X96X54mm
Net weight	616±20g
Power	30W-60W
Application temperature	-25°C ~ +50°C
IP Rate	IP68
LED Chip	SMD5050
Lumen	≥9000lm
Lumen efficacy	≥150 lm/W
Color temperature	2200K-6500K
CRI	70
Input Voltage and Current	220V 0.3A
Output Voltage and Current	70V 0.77A
Lifetime	50000H




ETL CE RoHS ErP CB TM21 LM79

## Dimension

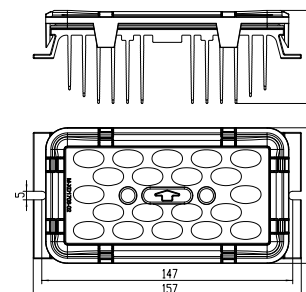

## Light Distribution Curve

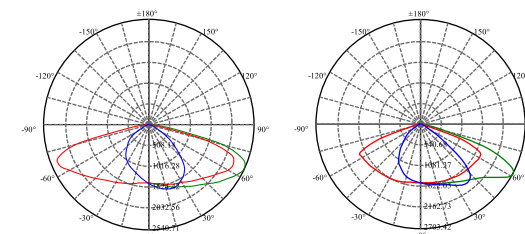


## Specification

Item No.	MK02
Dimension	157X80X54mm
Net weight	420±20g
Power	30W-40W
Application temperature	-25°C ~ +50°C
IP Rate	IP68
LED Chip	SMD5050
Lumen	≥6000lm
Lumen efficacy	≥150 lm/W
Color temperature	2200K-6500K
CRI	70
Input Voltage and Current	220V 0.19A
Output Voltage and Current	115V 0.3A
Lifetime	50000H




ETL CE RoHS ErP CB TM21 LM79

## Dimension

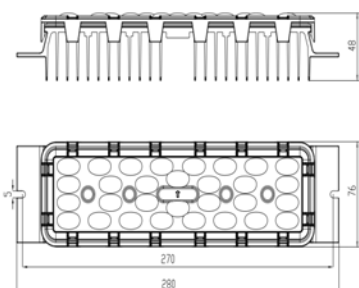

## Light Distribution Curve

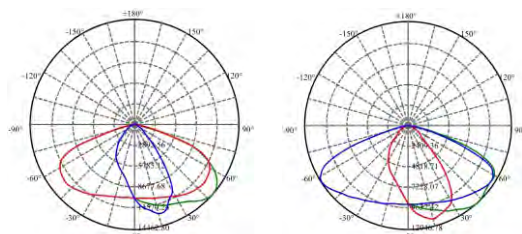


## Specification

Item No.	LD6900
Dimension	280X76X48mm
Net weight	616±20g
Power	30W-60W
Application temperature	-25°C ~ +50°C
IP Rate	IP68
LED Chip	SMD5050
Lumen	≥9000lm
Lumen efficacy	≥150 lm/W
Color temperature	2200K-6500K
CRI	70
Input Voltage and Current	220V 0.3A
Output Voltage and Current	70V 0.77A
Lifetime	50000H




ETL CE RoHS ErP CB TM21 LM79

## Dimension

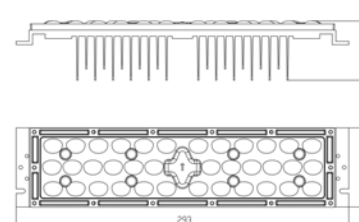

## Light Distribution Curve

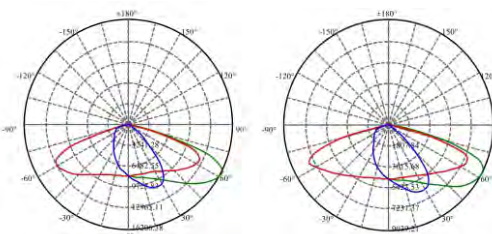



## Specification

Item No.	LD6700
Dimension	157X80X54mm
Net weight	420±20g
Power	30W-60W
Application temperature	-25°C ~ +50°C
IP Rate	IP66
LED Chip	SMD3030
Lumen	≥6000lm
Lumen efficacy	≥150 lm/W
Color temperature	2200K-6500K
CRI	70
Input Voltage and Current	220V 0.19A
Output Voltage and Current	115V 0.3A
Lifetime	50000H





Dimension

Light Distribution Curve

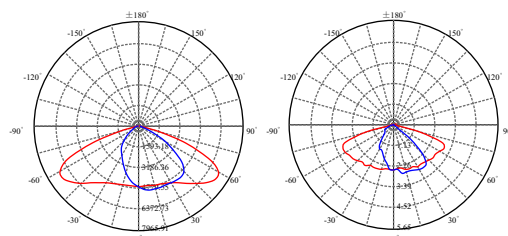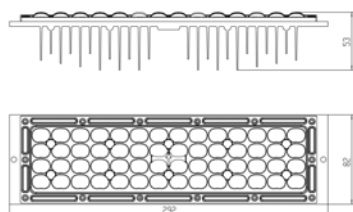

Dimension

Light Distribution Curve

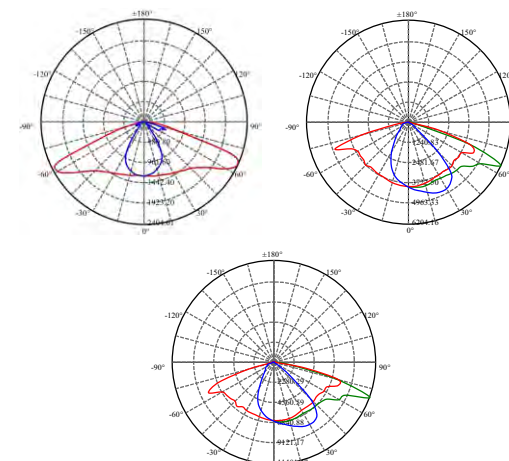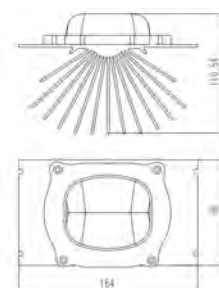


Specification

Item No.	LD5900
Dimension	157X80X54mm
Net weight	420±20g
Power	30W-60W
Application temperature	-25°C ~ +50°C
IP Rate	IP66
LED Chip	SMD3030
Lumen	≥6000lm
Lumen efficacy	≥150 lm/W
Color temperature	2200K-6500K
CRI	70
Input Voltage and Current	220V 0.19A
Output Voltage and Current	115V 0.3A
Lifetime	50000H

Specification


Item No.	LD1404
Dimension	166X98X53mm
Net weight	860±20g
Power	30W-70W
Application temperature	-25°C ~ +50°C
IP Rate	IP66
LED Chip	COB Luminus
Lumen	≥9100lm
Lumen efficacy	≥130 lm/W
Color temperature	2200K-6500K
CRI	70
Input Voltage and Current	220V 0.3A
Output Voltage and Current	36V 1.75A
Lifetime	50000H

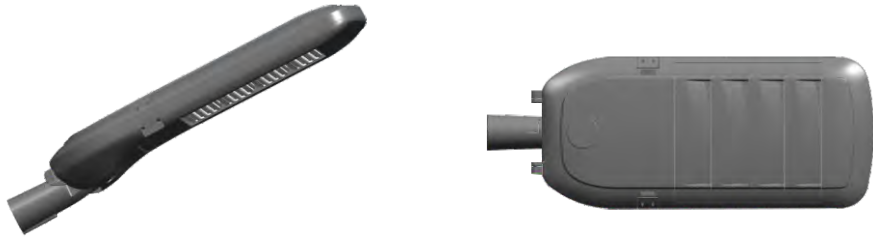

**Features**

- High lumen efficacy 150lm/w
- SMD5050, high CRI
- Private mold,good heat dissipation
- Easy to install and operate
- 50000hours,5years warranty
- Modular,easily replacement and maintaining
- Modular IP68 design
- Vertical and horizontal installation both available
- Photocell available
- Tool free design


**Light Distribution Curve**

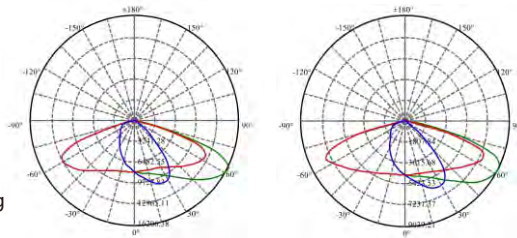

**Features**

- High lumen efficacy 150lm/w
- SMD5050, high CRI
- Private mold,good heat dissipation
- Easy to install and operate
- 50000hours,5years warranty
- Modular,easily replacement and maintaining
- Modular IP68 design
- Vertical and horizontal installation both available
- Photocell available
- Tool free design

**Light Distribution Curve**

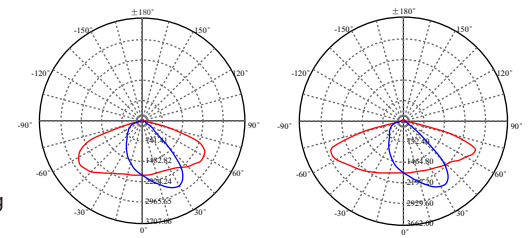

**Application**

Urban streets, Highways, Sidewalks, Bike paths, Gardens and parks, Architectural places, Parking lots, All kinds of residential area, courtyard.

**Application**

Urban streets, Highways, Sidewalks, Bike paths, Gardens and parks, Architectural places, Parking lots, All kinds of residential area, courtyard.

**Specification**

Model No.	Power	Voltage	LED Chip	Lamp Efficiency	Color Temp	CRI	IP Rate	Lifetime
XD-LD01-60W	60W	AC 100~240V	SMD 5050	> 140lm/W	3000K~6500K	70	IP66	50000hrs
XD-LD01-120W	120W	AC 100~240V	SMD 5050	> 145lm/W	3000K~6500K	70	IP66	50000hrs
XD-LD01-180W	180W	AC 100~240V	SMD 5050	> 150lm/W	3000K~6500K	70	IP66	50000hrs
XD-LD01-240W	240W	AC 100~240V	SMD 5050	> 150lm/W	3000K~6500K	70	IP66	50000hrs

**Specification**

Model No.	Power	Voltage	LED Chip	Lamp Efficiency	Color Temp	CRI	IP Rate	Lifetime
XD-LD02-60W	60W	AC 100~240V	SMD 5050	> 140lm/W	3000K~6500K	70	IP66	50000hrs
XD-LD02-120W	120W	AC 100~240V	SMD 5050	> 145lm/W	3000K~6500K	70	IP66	50000hrs
XD-LD02-180W	180W	AC 100~240V	SMD 5050	> 150lm/W	3000K~6500K	70	IP66	50000hrs
XD-LD02-240W	240W	AC 100~240V	SMD 5050	> 150lm/W	3000K~6500K	70	IP66	50000hrs



**Features**

- High lumen efficacy 120lm/w
- SMD3030, high CRI
- Private mold, good heat dissipation
- Easy to install and operate
- 50000hours, 5years warranty
- Easily replacement and maintaining
- Vertical and horizontal installation both available
- Glass cover, high strength impact resistance.
- Photocell available.
- Power turn off protector.
- Tool free design


**Application**

Urban streets, Highways, Sidewalks, Bike paths, Gardens and parks, Architectural places, Parking lots, All kinds of residential area, courtyard.

**Specification**

Model No.	Power	Voltage	LED Chip	Lamp Efficiency	Color Temp	CRI	IP Rate	Lifetime
XD-LD04-30W	30W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	70	IP66	50000hrs
XD-LD04-60W	60W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	70	IP66	50000hrs
XD-LD04-120W	120W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	70	IP66	50000hrs
XD-LD04-180W	180W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	70	IP66	50000hrs

**Light Distribution Curve**

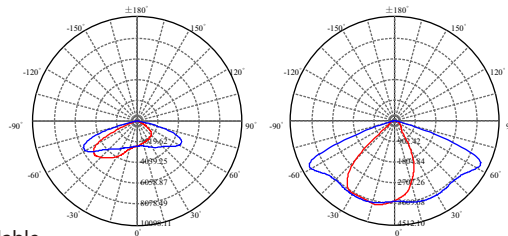

**Features**

- High lumen efficacy 150lm/w
- SMD5050 SMD3030 for options, high CRI
- Input voltage 100-240V
- Private mold, good heat dissipation
- Easy to install and operate
- 50000hours, 5years warranty
- Modular, easily replacement and maintaining
- Modular IP68 design


**Application**


Urban streets, Highways, Sidewalks, Bike paths, Gardens and parks, Architectural places, Parking lots, All kinds of residential area, courtyard.

**Specification**

Model No.	Power	Voltage	LED Chip	Lamp Efficiency	Color Temp	CRI	IP Rate	Lifetime
XD-LD03-60W	60W	AC 100~240V	SMD 5050	> 140lm/W	3000K~6500K	70	IP66	50000hrs
XD-LD03-120W	120W	AC 100~240V	SMD 5050	> 145lm/W	3000K~6500K	70	IP66	50000hrs
XD-LD03-180W	180W	AC 100~240V	SMD 5050	> 150lm/W	3000K~6500K	70	IP66	50000hrs

**Light Distribution Curve**

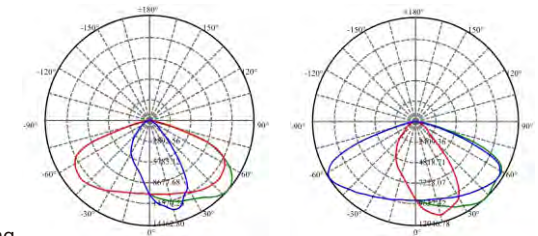


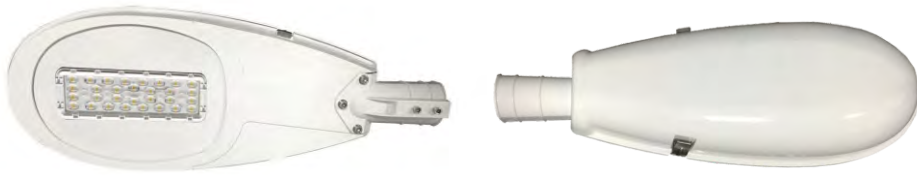

**Features**

- High lumen efficacy 150lm/w
- SMD5050, high CRI
- Private mold,good heat dissipation
- Easy to install and operate
- 50000hours,5years warranty
- Modular,easily replacement and maintaining
- Modular IP68 design
- Vertical and horizontal installation both available
- Photocell available
- Tool free design


**Light Distribution Curve**

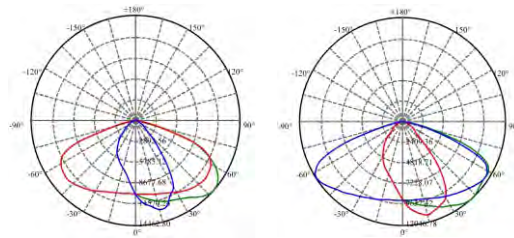

**Features**

- High lumen efficacy 150lm/w
- SMD5050, high CRI
- Input voltage 100-240V
- Private mold,good heat dissipation
- Easy to install and operate
- 50000hours,5years warranty
- Modular,easily replacement and maintaining
- Modular IP68 design

**Light Distribution Curve**

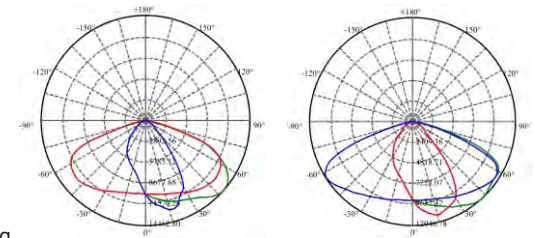

**Application**

Urban streets, Highways, Sidewalks, Bike paths, Gardens and parks, Architectural places, Parking lots, All kinds of residential area, courtyard.

**Application**

Urban streets, Highways, Sidewalks, Bike paths, Gardens and parks, Architectural places, Parking lots, All kinds of residential area, courtyard.

**Specification**

Model No.	Power	Voltage	LED Chip	Lamp Efficiency	Color Temp	CRI	IP Rate	Lifetime
XD-LD338B-60W	60W	AC 100~240V	SMD 5050	> 140lm/W	3000K~6500K	70	IP66	50000hrs
XD-LD338B-120W	120W	AC 100~240V	SMD 5050	> 150lm/W	3000K~6500K	70	IP66	50000hrs

**Specification**

Model No.	Power	Voltage	LED Chip	Lamp Efficiency	Color Temp	CRI	IP Rate	Lifetime
XD-LD6910-60W	60W	AC 100~240V	SMD 5050	> 140lm/W	3000K~6500K	70	IP66	50000hrs
XD-LD6920-120W	120W	AC 100~240V	SMD 5050	> 150lm/W	3000K~6500K	70	IP66	50000hrs
XD-LD6930-180W	180W	AC 100~240V	SMD 5050	> 150lm/W	3000K~6500K	70	IP66	50000hrs






**Features**

- High lumen efficacy 120lm/w
- SMD3030, high CRI
- Input voltage 100-240V
- Private mold,good heat dissipation
- Easy to install and operate
- 50000hours,5years warranty
- Modular,easily replacement and maintaining
- Modular IP68 design
- Tool free design

**Light Distribution Curve**

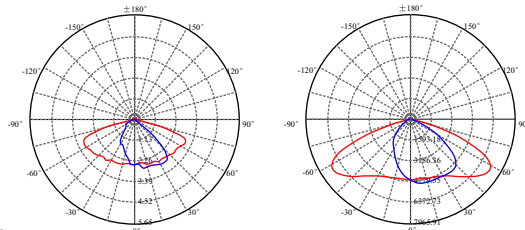

**Application**

Urban streets, Highways, Sidewalks, Bike paths, Gardens and parks, Architectural places, Parking lots, All kinds of residential area, courtyard.


**Specification**

Model No.	Power	Voltage	LED Chip	Lamp Efficiency	Color Temp	CRI	IP Rate	Lifetime
XD-LD5910-60W	60W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	70	IP66	50000hrs
XD-LD5920-120W	120W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	70	IP66	50000hrs
XD-LD5930-180W	180W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	70	IP66	50000hrs
XD-LD5940-240W	240W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	70	IP66	50000hrs

**Features**

- High lumen efficacy 150lm/w
- SMD5050, high CRI
- Input voltage 100-240V
- Private mold,good heat dissipation
- Easy to install and operate
- 50000hours,5years warranty
- Modular,easily replacement and maintaining
- Modular IP68 design
- Photocell available.
- Tool free design

**Light Distribution Curve**

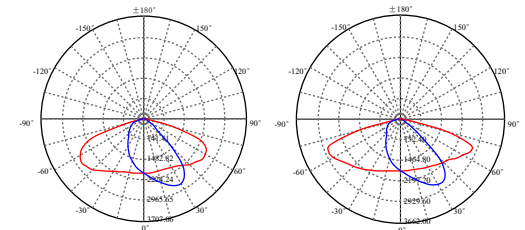

**Application**

Urban streets, Highways, Sidewalks, Bike paths, Gardens and parks, Architectural places, Parking lots, All kinds of residential area, courtyard.

**Specification**


Model No.	Power	Voltage	LED Chip	Lamp Efficiency	Color Temp	CRI	IP Rate	Lifetime
XD-LD6713-60W	60W	AC 100~240V	SMD 5050	> 140lm/W	3000K~6500K	70	IP66	50000hrs
XD-LD6723-120W	120W	AC 100~240V	SMD 5050	> 145lm/W	3000K~6500K	70	IP66	50000hrs
XD-LD6733-180W	180W	AC 100~240V	SMD 5050	> 150lm/W	3000K~6500K	70	IP66	50000hrs



**Features**

- High lumen efficacy 120lm/w
- Cree Chip, high CRI
- Input voltage 100-240V
- Private mold,good heat dissipation
- Easy to install and operate
- 50000hours,5years warranty

**Light Distribution Curve**

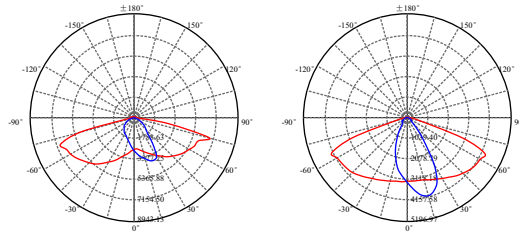

**Application**

Urban streets, Highways, Sidewalks, Bike paths, Gardens and parks, Architectural places, Parking lots, All kinds of residential area, courtyard.

**Specification**


Model No.	Power	Voltage	LED Chip	Lamp Efficiency	Color Temp	CRI	IP Rate	Lifetime
XD-LD1830-35W	35W	AC 100~240V	CREE	> 120lm/W	3000K~6500K	70	IP65	50000hrs
XD-LD4670-60W	60W	AC 100~240V	CREE	> 120lm/W	3000K~6500K	70	IP65	50000hrs
XD-LD4680-120W	120W	AC 100~240V	CREE	> 120lm/W	3000K~6500K	70	IP65	50000hrs



**Features**

- High lumen efficacy 150lm/w
- SMD5050, SMD3030 For optiouns, high CRI
- Input voltage 100-240V
- Private mold,good heat dissipation
- Easy to install and operate
- 50000hours,5years warranty
- Modular,easily replacement and maintaining
- Modular IP68 design

**Light Distribution Curve**

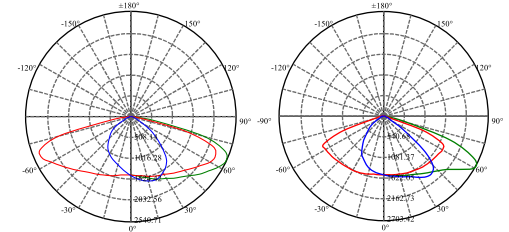


**Application**

Urban streets, Highways, Sidewalks, Bike paths, Gardens and parks, Architectural places, Parking lots, All kinds of residential area, courtyard.

**Specification**


Model No.	Power	Voltage	LED Chip	Lamp Efficiency	Color Temp	CRI	IP Rate	Lifetime
XD-TY01-60W	60W	AC 100~240V	SMD 5050	> 140lm/W	3000K~6500K	70	IP65	50000hrs
XD-TY01-120W	120W	AC 100~240V	SMD 5050	> 150lm/W	3000K~6500K	70	IP65	50000hrs

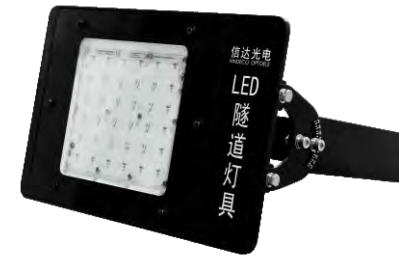

**Features**

- High lumen efficacy 120lm/w
- SMD3030, high CRI
- Private mold, good heat dissipation
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury
- 5 years warranty

**Light Distribution Curve**



**Application**

Airport, Commercial building, Construction engineering, Farm, Amusement parks, Parking lots, Harbor, Industrial buildings, Gymnasium park, All kinds of residential area and courtyard.


**Specification**

Model No.	Power	Voltage	LED Chip	Lamp Efficiency	Color Temp	CRI	IP Rate	Lifetime
XD-SD1910-60W	60W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	70	IP65	50000hrs

**Features**

- High lumen efficacy 120lm/w
- SMD3030, high CRI
- Private mold, good heat dissipation
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury
- 5 years warranty

**Light Distribution Curve**

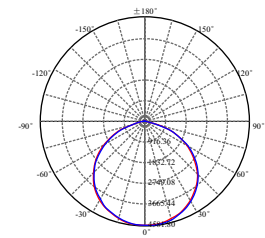

**Application**

Airport, Commercial building, Construction engineering, Farm, Amusement parks, Parking lots, Harbor, Industrial buildings, Gymnasium park, All kinds of residential area and courtyard.

**Specification**


Model No.	Power	Voltage	LED Chip	Lamp Efficiency	Color Temp	CRI	IP Rate	Lifetime
XD-TG1891-120W	120W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	70	IP65	50000hrs



**Features**

- High lumen efficacy 120lm/w
- COB Luminus, high CRI
- Private mold, good heat dissipation
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury
- 5 years warranty


**Light Distribution Curve**

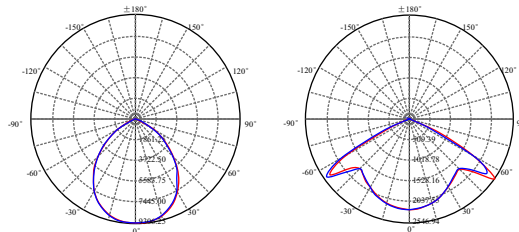

**Features**

- High lumen efficacy 120lm/w
- SMD3030, high CRI
- Private mold, good heat dissipation
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Beam angle adjustable
- 5 years warranty

**Light Distribution Curve**

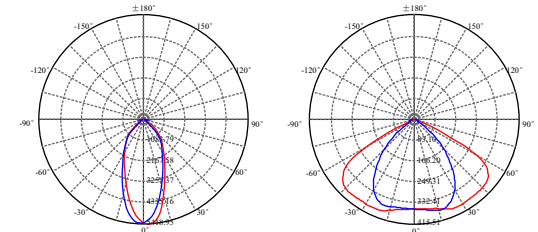

**Application**

Airport, Commercial building, Construction engineering, Farm, Amusement parks, Parking lots, Harbor, Industrial buildings, Gymnasium park, All kinds of residential area and courtyard.

**Application**

Airport, Commercial building, Construction engineering, Farm, Amusement parks, Parking lots, Harbor, Industrial buildings, Gymnasium park, All kinds of residential area and courtyard.

**Specification**

Model No.	Power	Voltage	LED Chip	Lamp Efficiency	Color Temp	CRI	IP Rate	Lifetime
XD-TG5211-60W	60W	AC 100~240V	COB	> 120lm/W	3000K~6500K	70	IP65	50000hrs
XD-TG5221-120W	120W	AC 100~240V	COB	> 120lm/W	3000K~6500K	70	IP65	50000hrs
XD-TG5231-180W	180W	AC 100~240V	COB	> 120lm/W	3000K~6500K	70	IP65	50000hrs
XD-TG5241-240W	240W	AC 100~240V	COB	> 120lm/W	3000K~6500K	70	IP65	50000hrs

**Specification**


Model No.	Power	Voltage	LED Chip	Lamp Efficiency	Color Temp	CRI	IP Rate	Lifetime
XD-TG5511-60W	60W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	70	IP65	50000hrs
XD-TG5521-120W	120W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	70	IP65	50000hrs
XD-TG5531-180W	180W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	70	IP65	50000hrs
XD-TG5541-240W	240W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	70	IP65	50000hrs



**Features**

- High lumen efficacy 120lm/w
- SMD3030, high CRI
- Private mold, good heat dissipation
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury
- 5 years warranty

**Light Distribution Curve**

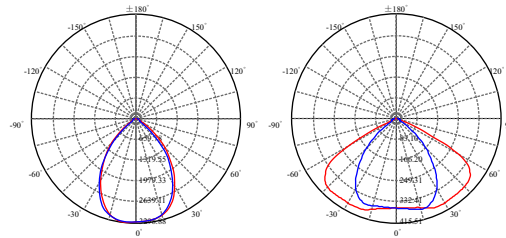

**Application**

Airport, Commercial building, Construction engineering, Farm, Amusement parks, Parking lots, Harbor, Industrial buildings, Gymnasium park, All kinds of residential area and courtyard.


**Specification**

Model No.	Power	Voltage	LED Chip	Lamp Efficiency	Color Temp	CRI	IP Rate	Lifetime
XD-TG3111-60W	60W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	70	IP65	50000hrs
XD-TG3121-120W	120W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	70	IP65	50000hrs
XD-TG3131-180W	180W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	70	IP65	50000hrs
XD-TG3141-240W	240W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	70	IP65	50000hrs

**Features**

- High lumen efficacy 150lm/w
- SMD5050, IP66 Design
- Private mold, good heat dissipation
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Photocell available
- 5 years warranty

**Light Distribution Curve**

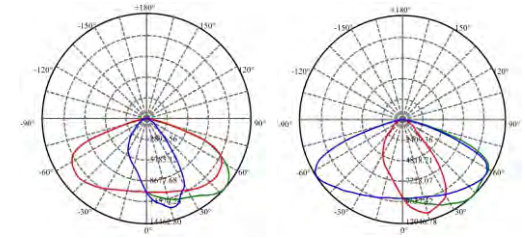

**Application**

Airport, Commercial building, Construction engineering, Farm, Amusement parks, Parking lots, Harbor, Industrial buildings, Gymnasium park, All kinds of residential area and courtyard.

**Specification**

Model No.	Power	Voltage	LED Chip	Lamp Efficiency	Color Temp	CRI	IP Rate	Lifetime
XD-TG01-60W	60W	AC 100~240V	SMD 5050	> 150lm/W	3000K~6500K	70	IP66	50000hrs
XD-TG01-120W	120W	AC 100~240V	SMD 5050	> 150lm/W	3000K~6500K	70	IP66	50000hrs
XD-TG01-180W	180W	AC 100~240V	SMD 5050	> 150lm/W	3000K~6500K	70	IP66	50000hrs
XD-TG01-240W	240W	AC 100~240V	SMD 5050	> 150lm/W	3000K~6500K	70	IP66	50000hrs




ETL CE RoHS ErP CB TM21 LM79

### Features

- High Lumen efficacy
- 60°/90°/120° for options
- All kinds of reflectors for options
- Unique heat sink design ensures superior heat management
- Long lifetime, 5 years warranty
- Motion sensor, daylight sensor available
- Zigbee available

### Light Distribution Curve

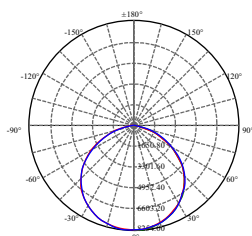

### Application

Gymnasium, Sports Stadium Lighting, Parking Lot, Square, Garden, Street Lighting, Supermarket, Garage Lighting, Workshop, Factory Lighting, Warehouse, Storage Lighting, Yard Station, etc.

### Specification

Model No.	Power	Voltage	LED Chip	Lamp Efficiency	Color Temp	CRI	IP Rate	Lifetime
XD-GK-W100C	100W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	80	IP65	50000hrs
XD-GK-W200C	200W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	80	IP65	50000hrs




ETL CE RoHS ErP CB TM21 LM79

### Features

- High Lumen efficacy
- 60°/90°/120° for options
- All kinds of reflectors for options
- Unique heat sink design ensures superior heat management
- Long lifetime, 5 years warranty
- Motion sensor, daylight sensor available
- Zigbee available

### Light Distribution Curve

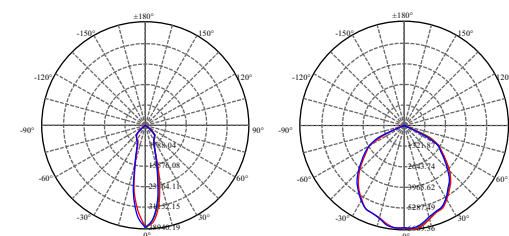

### Application

Gymnasium, Sports Stadium Lighting, Parking Lot, Square, Garden, Street Lighting, Supermarket, Garage Lighting, Workshop, Factory Lighting, Warehouse, Storage Lighting, Yard Station, etc.

### Specification


Model No.	Power	Voltage	LED Chip	Lamp Efficiency	Color Temp	CRI	IP Rate	Lifetime
XD-GK1400A/B-60W	60W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	80	IP65	50000hrs
XD-GK1400A/B-80W	80W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	80	IP65	50000hrs
XD-GK1400A/B-100W	100W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	80	IP65	50000hrs
XD-GK1400A/B-200W	200W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	80	IP65	50000hrs



**Features**

- High Lumen efficacy
- Different ways of installation for options
- All kinds of reflectors for options
- Unique heat sink design ensures superior heat management
- Long lifetime,5 years warranty

**Light Distribution Curve**

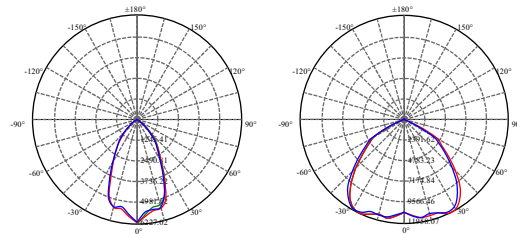

**Application**

Gymnasium, Sports Stadium Lighting, Parking Lot, Square, Garden, Street Lighting, Supermarket, Garage Lighting, Workshop, Factory Lighting, Warehouse, Storage Lighting, Yard Station, etc.


**Specification**

Model No.	Power	Voltage	LED Chip	Lamp Efficiency	Color Temp	CRI	IP Rate	Lifetime
XD-GK1402-100W	100W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	80	IP65	50000hrs
XD-GK1402-150W	150W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	80	IP65	50000hrs
XD-GK1402-200W	200W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	80	IP65	50000hrs
XD-GK1402-300W	300W	AC 100~240V	SMD 3030	> 120lm/W	3000K~6500K	80	IP65	50000hrs

**Features**

- High Lumen efficacy
- Different ways of installation for options
- Modular design, easily replace and maintain
- Unique heat sink design ensures superior heat management
- Long lifetime,3 years warranty

**Light Distribution Curve**

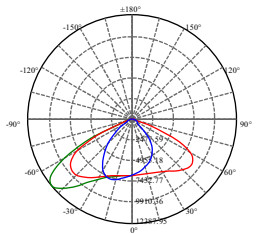

**Application**

Gymnasium, Sports Stadium Lighting, Parking Lot, Square, Garden, Street Lighting, Supermarket, Garage Lighting, Workshop, Factory Lighting, Warehouse, Storage Lighting, Yard Station, etc.

**Specification**


Model No.	Power	Voltage	LED Chip	Lamp Efficiency	Color Temp	CRI	IP Rate	Lifetime
XD-HFM01-50W	50W	AC 100~240V	SMD 2835	> 100lm/W	3000K~6500K	80	IP54	50000hrs
XD-HFM03-150W	150W	AC 100~240V	SMD 2835	> 100lm/W	3000K~6500K	80	IP54	50000hrs
XD-HFM04-200W	200W	AC 100~240V	SMD 2835	> 100lm/W	3000K~6500K	80	IP54	50000hrs



**Features**

- Photosensitive microwave available
- Full PC, safety and easy installed and using
- Flicker free
- High PF>0.9
- IP65
- 3 years warranty.
- Linking together available
- Emergency function available
- Suspended and surface mounted installation for options

**Light Distribution Curve**

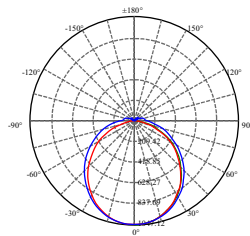

**Application**

Suitable for hospitals, Offices, Retail stores, Supermarkets, Schools, Hotels, Factories, Car parks and other indoor and outdoor places to use.


**Specification**

Model No.	Power	Voltage	LED Chip	Dimension	Lamp Efficiency	Color Temp	CRI	IP Rate	PF	Lifetime
BD-30W-04	30W	AC100~240V	SMD 2835	L: 600mm	> 80lm/W	3000K~6500K	80	IP65	>0.90	30000hrs
BD-60W-04	60W	AC100~240V	SMD 2835	L: 1200mm	> 80lm/W	3000K~6500K	80	IP65	>0.90	30000hrs
BD-75W-04	75W	AC100~240V	SMD 2835	L: 1500mm	> 80lm/W	3000K~6500K	80	IP65	>0.90	30000hrs

**Features**

- Switch on-off function available
- Full PC, safety and easy installed and using
- Flicker free
- High PF>0.9
- IP40
- 3 years warranty
- Linking together available
- Suspended and surface mounted installation for options

**Light Distribution Curve**

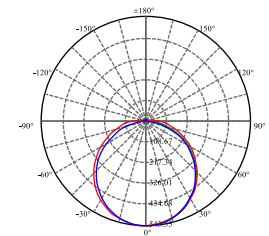

**Application**

Suitable for hospitals, Offices, Retail stores, Supermarkets, Schools, Hotels, Factories, Car parks and other indoor places to use.

**Specification**

Model No.	Power	Voltage	LED Chip	Dimension	Lamp Efficiency	Color Temp	CRI	IP Rate	PF	Lifetime
BD-18W-01	18W	AC100~240V	SMD 2835	L: 600mm	> 80lm/W	3000K~6500K	80	IP40	>0.90	30000hrs
BD-36W-01	36W	AC100~240V	SMD 2835	L: 1200mm	> 80lm/W	3000K~6500K	80	IP40	>0.90	30000hrs
BD-30W-05	30W	AC100~240V	SMD 2835	L: 600mm	> 80lm/W	3000K~6500K	80	IP40	>0.90	30000hrs
BD-60W-05	60W	AC100~240V	SMD 2835	L: 1200mm	> 80lm/W	3000K~6500K	80	IP40	>0.90	30000hrs






**Features**

- New design, few similar products in the market
- Full PC, safety and easy installed and using
- Flicker free
- High PF>0.9
- IP40
- 3 years warranty
- Linking together available
- Suspended and surface mounted installation for options

**Light Distribution Curve**

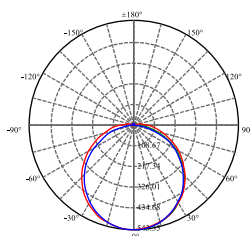

**Application**

Suitable for hospitals, Offices, Retail stores, Supermarkets, Schools, Hotels, Factories, Car parks and other indoor places to use.

**Specification**


Model No.	Power	Voltage	LED Chip	Dimension	Lamp Efficiency	Color Temp	CRI	IP Rate	PF	Lifetime
BD-30W-07	30W	AC100~240V	SMD 2835	L: 600mm	> 80lm/W	3000K~6500K	80	IP40	>0.90	30000hrs
BD-60W-07	60W	AC100~240V	SMD 2835	L: 1200mm	> 80lm/W	3000K~6500K	80	IP40	>0.90	30000hrs
BD-70W-07	70W	AC100~240V	SMD 2835	L: 1500mm	> 80lm/W	3000K~6500K	80	IP40	>0.90	30000hrs



**Features**

- New design, few similar products in the market
- Full PC, safety and easy installed and using
- Flicker free
- High PF>0.9
- IP65
- 3 years warranty
- Linking together available
- Suspended and surface mounted installation for options

**Light Distribution Curve**



**Application**

Suitable for hospitals, Offices, Retail stores, Supermarkets, Schools, Hotels, Factories, Car parks and other indoor and outdoor places to use.

**Specification**


Model No.	Power	Voltage	LED Chip	Dimension	Lamp Efficiency	Color Temp	CRI	IP Rate	PF	Lifetime
BD-18W-03	18W	AC100~240V	SMD 2835	L: 600mm	> 80lm/W	3000K~6500K	80	IP65	>0.90	30000hrs
BD-36W-03	36W	AC100~240V	SMD 2835	L: 1200mm	> 80lm/W	3000K~6500K	80	IP65	>0.90	30000hrs



**Features**

- Full range 0.6m 1.2m 1.5m
- Compatible with the magnetic ballast, easy replacement
- CE RoHS and Erp certification
- High lumen efficacy 100lm/w and 150lm/w max.
- OEM or ODM both available
- Automatic line production
- Full glass tube


**Light Distribution Curve**

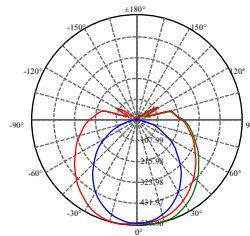

**Features**

- Automatic line production, capacity 3,000,000pcs/month
- IC Constant current driver
- High PF>0.9
- High lumen efficacy > 95lm/w
- Full range 5W 7W 9W 11W available.
- Aluminum coated palstic lamp body
- Wide input voltage from AC90~300V
- Two years warranty
- Flicker free
- B22 and E27 for options

**Light Distribution Curve**

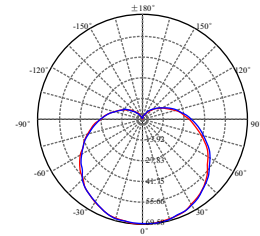

**Application**

Suitable for hospitals, Offices, Retail stores, Supermarkets, Schools, Hotels, Factories, Car parks and other indoor places to use.

**Application**

Residential and office lighting, Shopping malls, Shops and other commercial units, Industrial lighting, Architectural lighting, Museum, Theater and art lighting and so on.

**Specification**

Model No.	Power	Voltage	LED Chip	Dimension	Lamp Efficiency	Color Temp	CRI	IP Rate	PF	Lifetime
XD-T806/10-CB/O4	10W	AC220~240V	SMD2835	L: 600mm	> 110lm/W	3000K~6500K	80	IP20	>0.90	30000hrs
XD-T812/16-CB/O4	16W	AC220~240V	SMD2835	L: 1200mm	> 110lm/W	3000K~6500K	80	IP20	>0.90	30000hrs
XD-T812/20-CB/O4	20W	AC220~240V	SMD2835	L: 1200mm	> 110lm/W	3000K~6500K	80	IP20	>0.90	30000hrs
XD-T815/24-CB/O4	24W	AC220~240V	SMD2835	L: 1500mm	> 110lm/W	3000K~6500K	80	IP20	>0.90	30000hrs

**Specification**

Model No.	Power	Voltage	LED Chip	LED Driver	Lamp Efficiency	Color Temp	CRI	IP Rate	PF	Lifetime
XD-A60/5-A	5W	AC 90~300V	SMD 2835	IC Driver	> 95lm/W	3000K~6500K	80	IP20	>0.90	30000hrs
XD-A60/7-A	7W	AC 90~300V	SMD 2835	IC Driver	> 95lm/W	3000K~6500K	80	IP20	>0.90	30000hrs
XD-A60/9-A	9W	AC 90~300V	SMD 2835	IC Driver	> 95lm/W	3000K~6500K	80	IP20	>0.90	30000hrs
XD-A60/11-A	11W	AC 90~300V	SMD 2835	IC Driver	> 95lm/W	3000K~6500K	80	IP20	>0.90	30000hrs